


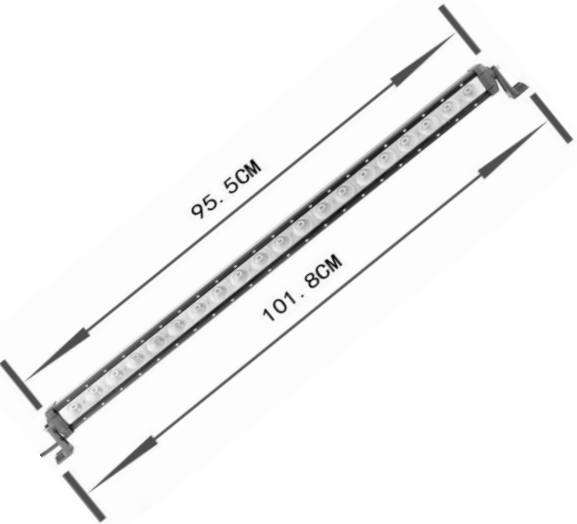


	<p>LAB920-S36</p>	<p>7.5inch 36W Strobe Amber/White Dual-row LED Light Bar</p> <ul style="list-style-type: none"> . Power: 36 W . Voltage: 9-32 V . Operating Lumens Output: 2520 LM . LED: 12pcs*3W (Taiwan Epistar LED) . Size: 191x87x111mm(7.5 Inch) . Beam: Spot beam 30degree, Flood beam 60degree, Combo beam . LED color temperature: 6000K . Working life: 50000 hours . Working temperature: -40~ 85℃ . Waterproof rate: IP67 . Material: 6063 aluminum profile, stainless steel bracket, PC Lens. 	<p>R 700.00</p>
	<p>LAB910-CF60</p>	<p>13.1inch 60W Single-row X5 CREE LED Light Bar</p> <ul style="list-style-type: none"> . LED Power: 60W . Operating Voltage: 10-30 DC,5400LM . Waterproof rate: IP 67 . 12pcs*5w high intensity CREE LEDES . Body Color: Black,White . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material:PC . Mounting Bracket: Alu firm bracket Beam: Flood beam pattern(60 degree) 30 degee spot beam optional . 30000 hours above life time . Dimensions:13.1 inch 	<p>R 900.00</p>

 	EX920-S120	<p>21.5inch 120W Strobe Amber/White Dual-row LED Light Bar</p> <ul style="list-style-type: none"> . Power: 120 W . Voltage: 9-32 V . Operating Lumens Output: 8400 LM . LED: 40pcs*3W (Taiwan Epistar LED) . Size: 628x87x111mm(21.5 Inch) . Beam: Spot beam 30degree, Flood beam 60degree, Combo beam . LED color temperature: 6000K . Working life: 50000 hours . Working temperature: -40~ 85°C . Waterproof rate: IP67 . Material: 6063 aluminum profile, stainless steel bracket, PC Lens. 	R 1 900.00
 	EX910-F120	<p>23.3inch 120W Single-row X10 CREE LED Light Bar</p> <ul style="list-style-type: none"> .LED Power:120W,Intensity:10800LM .Operating Voltage:10-30DC .Waterproof rate: IP67 .12pcs*10w high intensity CREE LEDs .Body Color:Black, White .Color Temperature:6000K .Material:Diecast aluminum housing .Lens material:PC .Mounting Bracket:Alu firm bracket .Optional Beam:Flood beam pattern(60 degree),or spot beam(30 degee) .30000 hours above life time .Dimensions:23.3 inch 	R 2 500.00

	LAB910-CF120	<p>25inch 120W Single-row X5 CREE LED Light Bar</p> <ul style="list-style-type: none"> . LED Power: 120W . Operating Voltage: 10-30 DC, 10800LM . Waterproof rate: IP 67 . 24pcs*5w high intensity CREE LEDs . Body Color: Black,White . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material:PC . Mounting Bracket: Alu firm bracket <p>Beam: Flood beam pattern(60 degree) 30 degee spot beam optional</p> <ul style="list-style-type: none"> . 30000 hours above life time . Dimensions:25 inch 	No stock
	LAB920-W126	<p>20inch 126W Dual-row X3 CREE LED Light Bar</p> <ul style="list-style-type: none"> . Power: 126W . Voltage: 9-32V . Theoretical Lumens Output: 12600 LM . Operating Lumens Output: 8820 LM . LED: 42pcs*3W (USA CREE LED) . Size: 505*73*107mm (20 Inch) . Beam: Spot beam or Flood beam or Combo beam . LED color temperature: 6000K . Working life: 50000 hours . Working temperature: -40~ 85°C . Waterproof rate: IP67 . Material: 6063 aluminum profile, stainless steel bracket, PC Lens. 	R 2 000.00

	<p>LAB920-W180</p>	<p>28inch 180W Dual-row X3 CREE LED Light Bar</p> <ul style="list-style-type: none"> . Power: 180W . Voltage: 9-32V . Theoretical Lumens Output: 18000 LM . Operating Lumens Output: 12600 LM . LED: 60pcs*3W (USA CREE LED) . Size: 715*73*107mm(28 Inch) . Beam: Spot beam, Flood beam, Combo beam . LED color temperature: 6000K . Working life: 50000 hours . Working temperature: -40~ 85°C . Waterproof rate: IP67 . Material: 6063 aluminum profile, stainless steel bracket, PC Lens. 	<p>R 2 600.00</p>
	<p>LAB910-F200</p>	<p>37.7inch 200W Single-row X10 CREE LED Light Bar</p> <ul style="list-style-type: none"> .LED Power:200W,Intensity:18000LM .Operating Voltage:10-30DC .Waterproof rate: IP67 20pcs*10w high intensity CREE LEDs .Body Color:Black, White .Color Temperature:6000K .Material:Diecast aluminum housing .Lens material:PC .Mounting Bracket:Alu firm bracket .Optional Beam:Flood beam pattern(60 degree),or spot beam(30 degee) .30000 hours above life time .Dimensions:37.7 inch .Size 1018mm x 90mm x 110mm 	<p>R 3 500.00</p>

	EX900-W10	<p>10W Round ATV/Bike CREE LED Work Light</p> <ul style="list-style-type: none"> . Power: 10W. . Voltage: 9-32V DC . Lumens: 720lm. . LED: 1pcs*10W USA CREE LED . Color temp: 6000K. . Beam: Flood or Spot . Life Span: 50000 hours . Size: 57*57*65mm Round . Lumens: 720LM 	R 450.00
	EX900-S12	<p>12W Square ATV/Bike LED Work Light</p> <ul style="list-style-type: none"> . Power: 12W . Voltage: 9-32V DC . Waterproof Rate: IP67 . 4PCS*3W high intensity Taiwan Epistar LEDs . Current draw: 1A@12V,0.5A@24V . Color Temp: 6000K . Housing: Diecast Aluminum . Lens: Glass . Bracket: Stainless Steel . Beam: Spot beam . Life Time: 50000 hours . Size: 66*66*65mm Square . Lumens: 950LM 	R 513.00

	EX900-S27	<p>27W Square LED Work Light</p> <ul style="list-style-type: none"> . Power: 27W . Voltage: 9-32V DC . Waterproof Rate: IP67 . 9PCS*3W high intensity Taiwan Epistar LED . Lumin:1755lum . Current Draw 1.7A@13V,0.9A@24V . Color Temp: 6000K . Housing: Diecast Aluminum . Lens: PMMA . Beam: Spot or Flood . Life Time: 50000 hours . Size: 128*110*55mm Square 	R 362.00
	EX900-P27	<p>27W Portable LED Work Light with Magnetic Base, 2.5m Cable, Car Cigarette Lighter</p> <ul style="list-style-type: none"> . Magnetic and Handle, Wire Length 2.5M with Plug . Power: 27W . Voltage: 9-32V DC . Waterproof Rate: IP 67 . 9PCS*3W high intensity Taiwan Epistar LED . Lumin:1800lum . Current Draw 1.7A@13V,0.9A@24V . Color Temp: 6000K . Housing: Diecast Aluminum . Lens: PMMA . Beam: Spot orFlood . Life Time: 50000 hours . Size: 4.5 Inch Round 	R 380.00

	EX900-W40	<p>40W Square CREE LED Work Light</p> <ul style="list-style-type: none"> . Power: 40W . Voltage: 9-32V DC . Waterproof Rate: IP67 . 4PCS*10W high intensity USA CREE LEDs . Current Draw 3A@12V,1.5A@24V . Color Temp: 6000K . Housing: Diecast Aluminum . Lens: PMMA . Bracket: Stainless Steel . Beam: Spot 25degree or Flood 45degree . Life Time: 50000 hours . Size: 110*110*72mmSquare . Lumen: 3600LM 	R 700.00
	EX900-W48	<p>48W Square LED Work Light</p> <ul style="list-style-type: none"> . Power: 48W . Voltage: 9-32V DC . Waterproof Rate: IP67 . 16PCS*3W high intensity Taiwan Epistar LEDs . Current draw: 3.8A @ 12V,1.9A @24V . Color Temp: 6000K . Housing: Diecast Aluminum . Lens : PMMA . Bracket: Stainless Steel . Beam: Spot or flood . Life Time: 50000 hours . Size: 110*110*72mmSquare . Lumen: 3500LM 	R 550.00

	EX900-C60	<p>60W Square CREE LED Work Light</p> <ul style="list-style-type: none"> . Power: 60W . Voltage: 9-32V DC . Waterproof Rate: IP67 . 6PCS*10W high intensity USA CREE LEDs . Current Draw 4A@12V, 2A@24V . Color Temp: 6000K . Housing: Diecast Aluminum . Lens: PMMA . Bracket: Stainless Steel . Optional Beam: Flood Beam or Spot beam . Life Time: 50000 hours above . Size: 140*95.5*179.4 mm(6 Inch) . Lumen: 4500LM 	R 1 300.00
	LAB900-G60	<p>7inch 60W Round CREE LED Work Light</p> <ul style="list-style-type: none"> . LED Power: 60W . Operating Voltage: 10-30 DC . Waterproof rate: IP 67 . 12pcs*5w high intensity CREE LEDS . Body Color: Black,White . Color Temperature: 6000K . Material:Diecast aluminum housing . Lens material:Toughed glass . Mounting Bracket: Alu firm bracket . Beam: Flood beam pattern(60 degree), 30 degee spot beam optional . 30000 hours above life time . Dimensions:7 inch 	R 1 300.00

	<p>EX900-C80</p>	<p>80W Square CREE LED Work Light . Power: 80W . Voltage: 9-32V DC . Waterproof Rate: IP67 . 8PCS*10W high intensity USA CREE LEDs . Current Draw 6.4A@12V,3.2A@24V . Color Temp: 6000K . Housing: Diecast Aluminum . Lens: PMMA . Bracket: Stainless Steel . Optional Beam: Flood Beam or Spot beam or Combo beam . Life Time: 50000 hours above . Size: 140*95.5*179.4 mm(6 Inch) . Lumen: 6500LM</p>	<p>R 1 600.00</p>
	<p>EX900-P15</p>	<p>Hand Held Rechargeable 15W LED Work Light LED Power:15W Charge Time: 3h, Lasting Time: >4h Battery: 2650 mAh 7.4 V LED: 5x 3w EPISTAR Chips Mounts: Stainless steel mounting brackets Lumen: 1000lm Voltage: DC 10-30V Beam: Flood Waterproof rate: IP 67 Color Temperature: 6000K Lens material: PMMA</p>	<p>R 850.00</p>

	EXB-H4-40	<p>Voltage:DC9-24V(Wide voltage range) LED Chip: CREE-XBD Power:Hi 30W, Low 15W Lumen:Hi2000LM, Low1500LM Lighting Angle:360° Feature:Creative Twice Lighting/Built-in Cooling Fan/IP68 Waterproof Grade/Dural Ball/5000RPM Color Temp.:Pure White (optional Warm White) Base Type: H4</p>	R 1200.00/pair
---	-----------	---	----------------